



Elektro-Automatik



DATASHEET

EA-PSBE 10000 4U

Programmable Bidirectional
DC Power Supply

EA-PSBE 10000 4U 30 KW

Programmable bidirectional
DC power supply



Features

- Wide range input: 208 V - 480 V, $\pm 10\%$, 3ph AC
- Active Power Factor Correction, typical 0.99
- Bidirectional power supply, 2-quadrants in source and sink
- In load operation, regenerative with energy recovery into the grid
- Very high efficiency of up to 96%
- High performance with up to 30 kW per unit
- Voltages from 0 - 10 V up to 0 - 2000 V
- Currents from 0 - 40 A up to 0 - 1000 A
- Flexible, power regulated DC output stages (autoranging)
- Regulation modes CV, CC, CP, CR with fast crossover
- Digital regulation, high resolution with 16bit ADCs and DACs, selection of voltage regulation speed: Normal, Fast, Slow
- Color 5" TFT display with touch control and intuitive user interface
- Galvanically isolated Share bus for parallel operation of all power classes in the 10000 series
- Master-slave bus for parallel operation of up to 64 units of all power classes in the 10000 series
- Command languages and drivers: SCPI and ModBus, LabVIEW, IVI

Built-in interfaces

- USB
- Ethernet
- Analog
- USB Host
- Master-Slave-Bus
- Share-Bus

Optional interfaces

- CAN
- CANopen
- RS232
- Profibus
- EtherCAT
- Profinet, with one or two ports
- Modbus, with one or two ports
- Ethernet, with one or two ports

Software

- EA-Power Control
- EA-Battery Simulator

Options

- Water Cooling in stainless steel

Technical data

General specifications	
AC input	
Voltage, Phases	Range 1: 208 V, $\pm 10\%$, 3ph AC (with DC output power derating to 18 kW) Range 2: 380 - 480 V, $\pm 10\%$, 3ph AC
Frequency	45 - 65 Hz
Power factor	ca. 0.99
Leakage current	< 10 mA
Inrush current / Phase current	≤ 56 A
Overvoltage category	2
DC output static	
Load regulation CV	$\leq 0.05\%$ FS (0 - 100% load, constant output voltage and constant temperature)
Line regulation CV	$\leq 0.01\%$ FS (208 V - 480 V AC $\pm 10\%$ supply voltage, constant load and constant temperature)
Stability CV	$\leq 0.02\%$ FS (during 8 h of operation, after 30 minutes warm-up, at constant output voltage, load and temperature)
Temperature coefficient CV	≤ 30 ppm/ $^{\circ}\text{C}$ (after 30 minutes of warm-up)
Compensation (Remote Sense)	$\leq 5\%$ U_{Nominal}
Load regulation CC	$\leq 0.1\%$ FS (0 - 100% load, constant output voltage and constant temperature)
Line regulation CC	$\leq 0.01\%$ FS (208 V - 480 V AC $\pm 10\%$ supply voltage, constant load and constant temperature)
Stability CC	$\leq 0.02\%$ FS (during 8 h of operation, after 30 minutes warm-up, at constant output voltage, load and temperature)
Temperature coefficient CC	≤ 50 ppm/ $^{\circ}\text{C}$ (after 30 minutes of warm-up)
Load regulation CP	$\leq 0.3\%$ FS (0 - 100% load, constant output voltage and constant temperature)
Load regulation CR	$\leq 0.3\%$ FS + 0.1% FS current (0 - 100% load, constant output voltage and constant temperature)
Protective functions	
OVP	Overvoltage protection, adjustable 0 - 110% U_{Nominal}
OCP	Overcurrent protection, adjustable 0 - 110% I_{Nominal}
OPP	Overpower protection, adjustable 0 - 110% P_{Nominal}
OT	Overtemperature protection (DC output shuts down in case of insufficient cooling)
DC output dynamic	
Rise time 10 - 90% CV	≤ 10 ms
Fall time 90 - 10% CV	≤ 10 ms
Rise time 10 - 90% CC	≤ 2 ms
Fall time 90 - 10% CC	≤ 2 ms
Display accuracy	
Voltage	$\leq 0.05\%$ FS
Current	$\leq 0.1\%$ FS
Insulation	
AC input to DC output	3750 Vrms (1 minute, creepage distance > 8 mm) *1
AC input to case (PE)	2500 Vrms
DC output to case (PE)	Depending on the model, see model tables
DC output to interfaces	1000 V DC (models up to 360 V rating), 1500 V DC (models from 500 V rating)
Interfaces digital	
Built-in, galvanically isolated	USB, Ethernet (100 MBit) for communication, 1x USB host for data acquisition
Optional, galvanically isolated	CAN, CANopen, RS232, ModBus TCP, Profinet, Profibus, EtherCAT, Ethernet
Interfaces analog	
Built-in, galvanically isolated	15 pole D-Sub
Signal range	0 - 10 V or 0 - 5 V (switchable)
Inputs	U, I, P, R, remote control on/off, DC output on/off, resistance mode on/off
Outputs	Monitor U and I, alarms, reference voltage, DC output status, CV/CC regulation mode
Accuracy U / I / P / R	0 - 10 V: $\leq 0.2\%$, 0 - 5 V: $\leq 0.4\%$

*1 Models up to 80 V DC rating have reinforced insulation while all other models from 200 V DC rating have basic insulation

General specifications	
Device configuration	
Parallel operation	Up to 64 units of any power class in series 10000, with master-slave bus and Share bus
Safety and EMC	
Safety	EN 61010-1 IEC 61010-1 UL 61010-1 CSA C22.2 No 61010-1 BS EN 61010-1
EMC	EN 55011, class B CISPR 11, class B FCC 47 CFR part 15B, unintentional radiator, class B EN 61326-1 include tests according to: - EN 61000-4-2 - EN 61000-4-3 - EN 61000-4-4 - EN 61000-4-5 - EN 61000-4-6
Safety protection class	1
Ingress Protection	IP20
Environmental conditions	
Operating temperature	0 - 50 °C (32 - 122 °F)
Storage temperature	-20 - 70 °C (-4 - 158 °F)
Humidity	≤80% relative humidity, non-condensing
Altitude	≤2000 m (≤6,600 ft)
Pollution degree	2
Mechanical construction	
Cooling	Forced air flow from front to rear (temperature controlled fans), optional water cooling
Dimensions (W x H x D)	Enclosure: 19" x 4U x 668 mm (26.3 in) Total: 19" x 4U x min. 785 mm (31 in)
Weight	50 kg (110 lb)
Weight with water cooling	56 kg (126 lb)

Technical specifications	PSBE 10010-1000	PSBE 10060-1000	PSBE 10080-1000	PSBE 10200-420
DC output				
Voltage range	0 - 10 V	0 - 60 V	0 - 80 V	0 - 200 V
Ripple in CV (rms)	≤25 mV (BW 300 kHz)	≤25 mV (BW 300 kHz)	≤25 mV (BW 300 kHz)	≤40 mV (BW 300 kHz)
Ripple in CV (pp)	≤320 mV (BW 20 MHz)	≤320 mV (BW 20 MHz)	≤320 mV (BW 20 MHz)	≤300 mV (BW 20 MHz)
U_{Min} for I_{Max} (sink)	0.6 V	0.6 V	0.6 V	2 V
Current range	0 - 1000 A	0 - 1000 A	0 - 1000 A	0 - 420 A
Power range	0 - 10000 W	0 - 30000 W	0 - 30000 W	0 - 30000 W
Resistance range	0.003 Ω - 5 Ω	0.003 Ω - 5 Ω	0.003 Ω - 5 Ω	0.0165 Ω - 25 Ω
Output capacitance	25380 μF	25380 μF	25380 μF	5400 μF
Efficiency sink/source (up to)	93.8% *1	95.1% *1	95.5% *1	95.3% *1
Insulation				
Negative DC pole <-> PE	±600 V DC	±600 V DC	±600 V DC	±1000 V DC
Positive DC pole <-> PE	+600 V DC	+600 V DC	+600 V DC	+1000 V DC
Article numbers				
Standard	30000851	30000840	30000841	30000842
Standard + Water Cooling	30000850	upon request	upon request	upon request

*1 At 100% power and 100% output voltage

Technical specifications	PSBE 10360-240	PSBE 10500-180	PSBE 10750-120	PSBE 10920-125
DC output				
Voltage range	0 - 360 V	0 - 500 V	0 - 750 V	0 - 920 V
Ripple in CV (rms)	≤55 mV (BW 300 kHz)	≤70 mV (BW 300 kHz)	≤200 mV (BW 300 kHz)	≤200 mV (BW 300 kHz)
Ripple in CV (pp)	≤320 mV (BW 20 MHz)	≤350 mV (BW 20 MHz)	≤800 mV (BW 20 MHz)	≤800 mV (BW 20 MHz)
U_{Min} for I_{Max} (sink)	2.5 V	1.1 V	1.2 V	2 V
Current range	0 - 240 A	0 - 180 A	0 - 120 A	0 - 125 A
Power range	0 - 30000 W	0 - 30000 W	0 - 30000 W	0 - 30000 W
Resistance range	0.05 Ω - 90 Ω	0.08 Ω - 170 Ω	0.2 Ω - 370 Ω	0.25 Ω - 550 Ω
Output capacitance	1800 μF	675 μF	450 μF	100 μF
Efficiency sink/source (up to)	95.8% *1	96.5% *1	96.5% *1	96.5% *1
Insulation				
Negative DC pole <-> PE	±1000 V DC	±1500 V DC	±1500 V DC	±1500 V DC
Positive DC pole <-> PE	+1000 V DC	+2000 V DC	+2000 V DC	+2000 V DC
Article numbers				
Standard	30000843	30000844	30000845	30000849
Standard + Water Cooling	upon request	upon request	upon request	upon request

*1 At 100% power and 100% output voltage

Technical specifications	PSBE 11000-80	PSBE 11500-60	PSBE 12000-40	
DC output				
Voltage range	0 - 1000 V	0 - 1500 V	0 - 2000 V	
Ripple in CV (rms)	≤300 mV (BW 300 kHz)	≤400 mV (BW 300 kHz)	≤400 mV (BW 300 kHz)	
Ripple in CV (pp)	≤1600 mV (BW 20 MHz)	≤2400 mV (BW 20 MHz)	≤2400 mV (BW 20 MHz)	
U_{Min} for I_{Max} (sink)	3.4 V	3.2 V	3.7 V	
Current range	0 - 80 A	0 - 60 A	0 - 40 A	
Power range	0 - 30000 W	0 - 30000 W	0 - 30000 W	
Resistance range	0.4 Ω - 650 Ω	0.8 Ω - 1500 Ω	1.7 Ω - 2700 Ω	
Output capacitance	200 μF	75 μF	50 μF	
Efficiency sink/source (up to)	95.8% *1	96.5% *1	96.5% *1	
Insulation				
Negative DC pole <-> PE	±1500 V DC	±1500 V DC	±1500 V DC	
Positive DC pole <-> PE	+2000 V DC	+2000 V DC	+2000 V DC	
Article numbers				
Standard	30000846	30000847	30000848	
Standard + Water Cooling	upon request	upon request	upon request	

*1 At 100% power and 100% output voltage

General


The bidirectional DC laboratory power supplies in the PSBE 10000 series from EA Elektro-Automatik are two quadrant devices which can perform the function of a power supply (source) as well as that of an electronic load (sink). In sink mode the device is regenerative and feeds the energy back into the local grid with an efficiency of up to 96%. The PSBE 10000 series includes single and three phase units which, together with the wide input range, allows use with practically all global mains voltages. The DC voltages and currents are determined by the application and the spectrum ranges from 0 - 10 V to 0 - 2000 V and from 0 - 6 A up to 0 - 1000 A in a single device. The DC supply operates as a flexible output stage with a constant power characteristic (autoranging) with a wide voltage and current range. To achieve higher power and current all units are equipped with a master-slave bus. This enables up to 64 parallel connected devices to be combined into one system which can provide up to 1920 kW and 64000 A. Such a system works as a single unit and can use different power classes, only the voltage class must remain constant. In this way a user can construct a 75 kW system from two 30 kW 4U and one 15 kW 3U device from the PSB or PSBE 10000 range. Furthermore, typical laboratory functionality is provided. This includes an alarm management, various optional industrial interfaces, software solutions and many more functions.

AC connection

The DC power supplies in the PSBE 10000 series are equipped with an active PFC which provides a high efficiency at a low energy consumption. Furthermore, the devices in this series provide a wide input voltage range. It reaches from 110/120 V up to 240 V with 1-phase models and from 208 V to 380/400/480 V with 3-phase models. Hence the devices can be operated in the majority of global grids. They adjust automatically, without additional configuration, to the available grid voltage. In a 110/120 V and 208 V AC grid a derating of the DC output power is automatically set.

Energy recovery

The energy consumed in load mode is fed back into the connected grid with an efficiency of up to 96%. As the energy is not converted to heat as in other loads, the energy costs are reduced. In addition, the devices generate less heat requiring less cost intensive air conditioning. One device can already be sufficient for a while range of applications, reducing investment and installation costs.

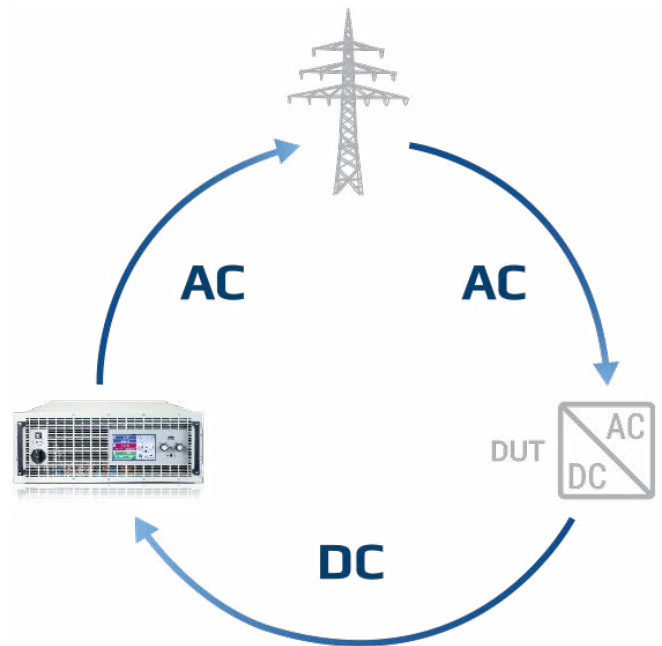

The principle of energy recovery


The figure above demonstrates, based on a typical application, how a „device under test“ consumes energy from the mains, converts it to DC and feeds that into an EA device. The bidirectional power supply PSBE 10000 converts this energy back into an AC current and feeds it back into the grid.

DC output

The DC output of the power supplies in series PSBE 10000 4U is rated for DC voltages of 0 - 60 V up to 0 - 2000 V, allowing currents of 0 - 40 A up to 0 - 1000 A. The flexible output stages (autoranging) provide the user with a wide voltage, current and power range and hence a wider field of working than traditional power supplies.

DC connection

Connection of the DC output is done via copper blades on the back side of the device. If a system with higher performance is required, the devices are simply connected in parallel. With minimal effort devices can be linked with the vertical copper rails. A cover for contact protection is provided.

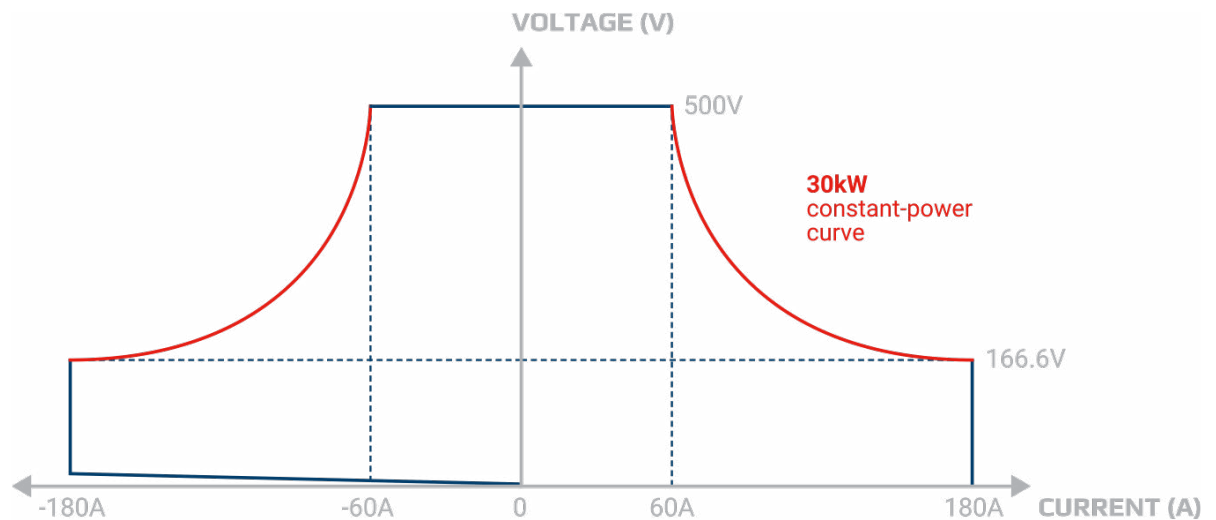

The principle of autoranging

„Autoranging“ is a term used when a programmable DC power supply automatically offers a wider output range of both, voltage and current, to maintain full power across a wide operation range. This type of solution allows the use of a single unit to address multiple voltage and current combinations.

Interfaces

As standard, 10000s series devices are fitted with the most important interfaces and ports which are all galvanically isolated from the DC input. There is an analog interface which can be parameterized for input and output, control and monitoring, of 0 - 5 V or 0 - 10 V for voltage, current, power and resistance, assorted inputs and outputs as well as USB and Ethernet ports. Further optional industrial interface for plug & play slot complete the portfolio:

- CAN
- CANopen
- RS232
- Profibus
- EtherCAT
- Profinet, with one or two ports
- Modbus, with one or two ports
- Ethernet, with one or two ports

High performance systems

High power applications can be covered with high power systems of up to 1920 kW. This is achieved by connecting the DC terminals of multiple PSBE 10000 4U devices with vertical copper rails in parallel. Thus, a 19" cabinet with 42 U can provide a system with 240 kW occupying only 0.6 m² (6.5 sqft) of floor space. The master-slave bus allows for up to 8 cabinets with a maximum of 64 units with 30 kW each to behave as one unit.

Master-slave bus and Share bus

When the integrated master-slave bus and Share bus are used, a multi device system behaves as a single device. The buses are simply connected between each device. With the master-slave bus the system data, such as total power and total current, are collected and displayed on the master unit. Warnings and alarms of the slave devices are also clearly displayed. The Share bus cares for a balanced load distribution between the individual units.



Example representation

In this illustration you can see a fully assembled and wired 240 kW system

Application

Battery simulation

Additional applications include the simulation of batteries as single cells, modules, or packs. These simulations aid in the optimal configuration of energy storage as well as the supplied components under test. Wherever reproducible data are needed a battery simulator is the first choice. Also, the use of a power source as simulator provides protection for the connected consuming component. The overcurrent protection (OCP) can, like a safety fuse, switch off the output and generate an alarm. The voltage can be monitored and can, if over or under limits, trigger various functions, and also generate warnings and alarms. Thus, many integrated functions can be safely performed.

Fuel cell test

The devices in the PSBE 10000 range may be used for testing the electrical features of fuel cells, fuel cell stacks and fuel cell systems. Here they generate highly accurate and reproducible results in all electrical modes. To test the resistance, performance, and active life of a fuel cell quickly and economically users can readily incorporate the devices into an automatic test system. The feedback capability guarantees high level of energy and cost efficiency. If higher currents are needed for testing a complete fuel cell system, then multiple devices can be connected in parallel in a master-slave system. High accuracy and performance are maintained here.


On-board charger test

In an on-board charger (OBC) test the electrical features must be tested under various conditions. This requires a flexible test system which also provides test data. With the sequencing and logging functions of the software EA-Power Control it allows data to be exported and saved. In this way applications can instantly generate reproducible test results based on dynamic and highly accurate set point and measurement data. To avoid competition between two separate control loops of the device under test (DUT) and the testing device, the voltage regulation speed of the bidirectional power supply is adjustable. The modes Normal, Fast and Slow allow the PSBE 10000 devices to be adapted the control characteristics of the on-board charger.


Battery recycling

In combination with the software EA-Power Control it's possible to assess retired batteries from electric vehicles for a possible further use. Assessment of a battery pack starts with a state of health (SOH) check to determine if a second life is feasible. This integrated function can be initiated with one click. If this check shows too little rest capacity, then the battery must be fully discharged before recycling. The autoranging of the devices guarantees the maximum possible total discharge, even with voltages under 2 V. The mains feedback to the power grid at up to 96% efficiency makes this process highly cost effective.

Technical drawings PSBE 10000 4U ≤200 V

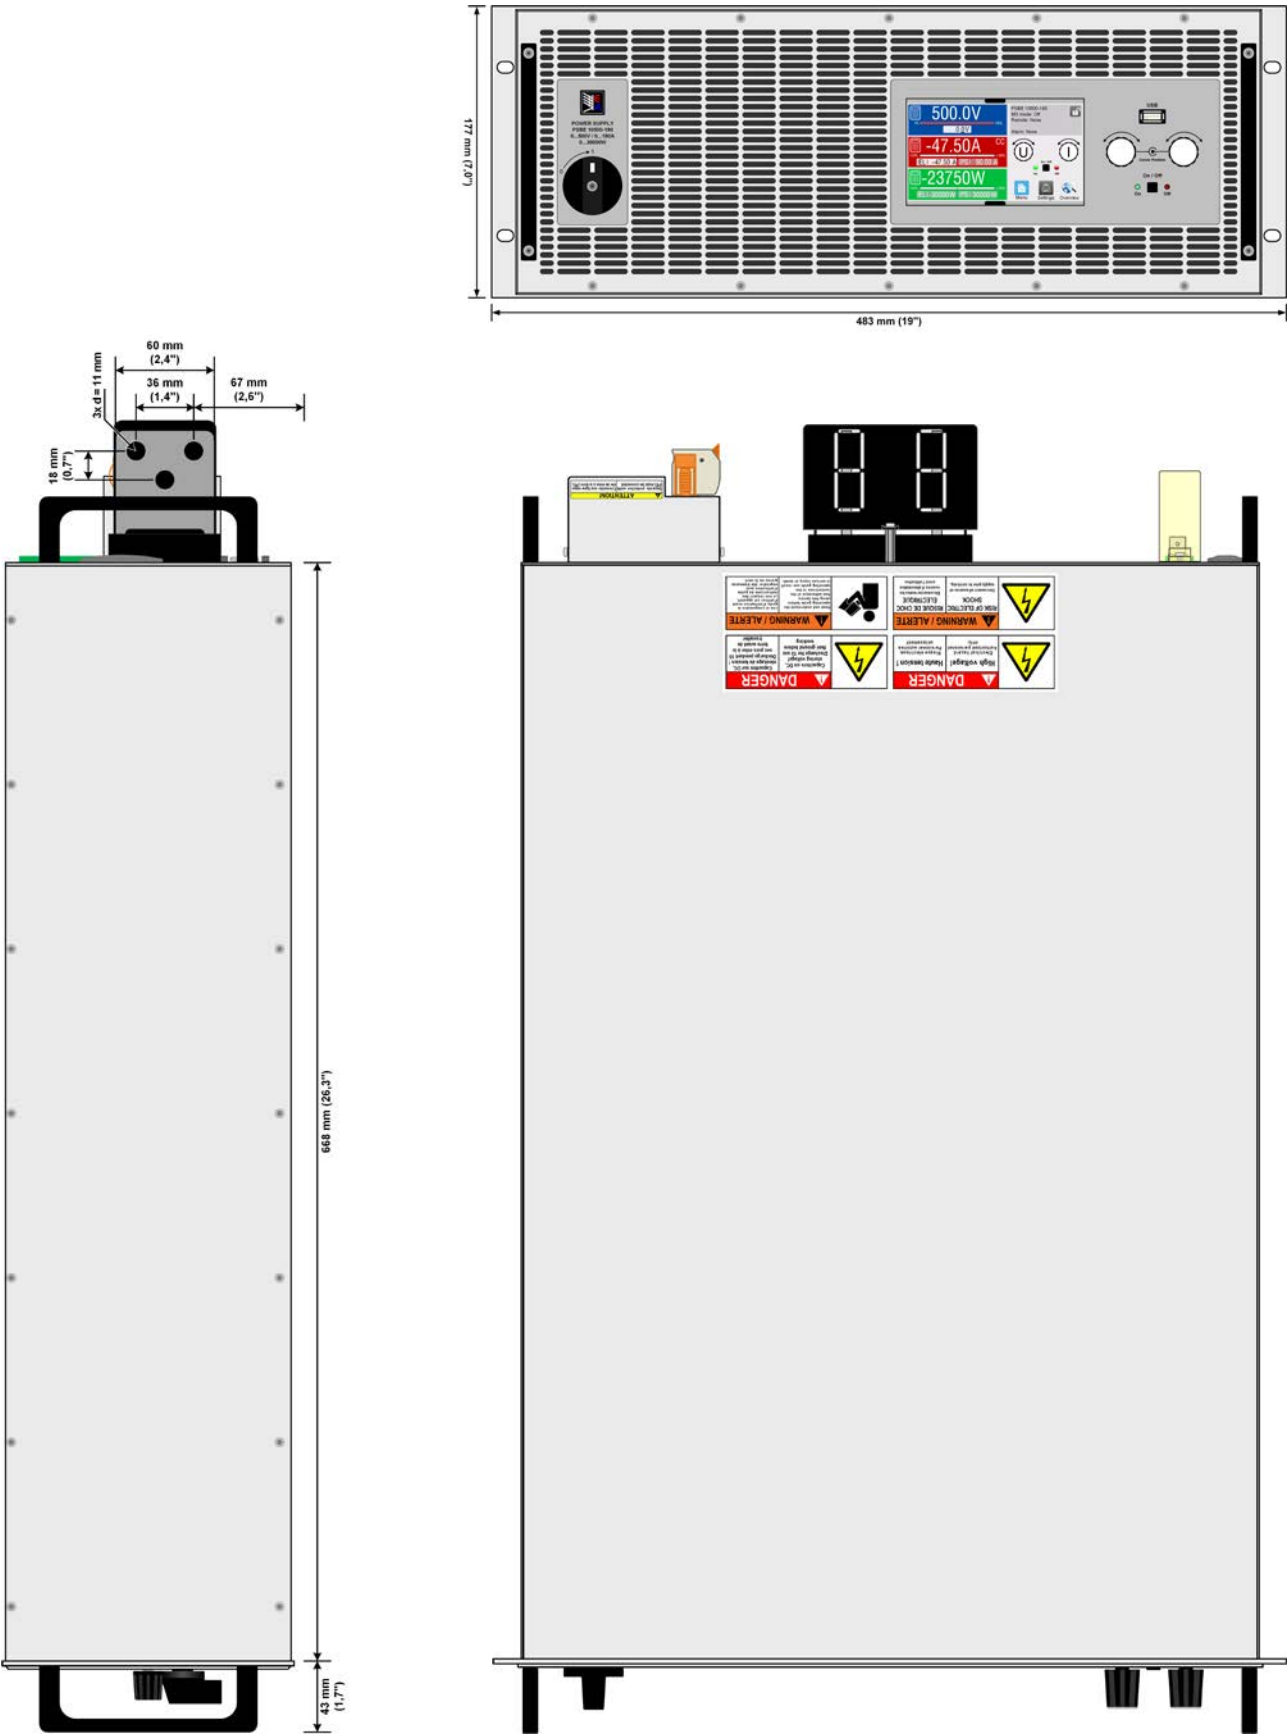


Front panel description PSBE 10000 4U

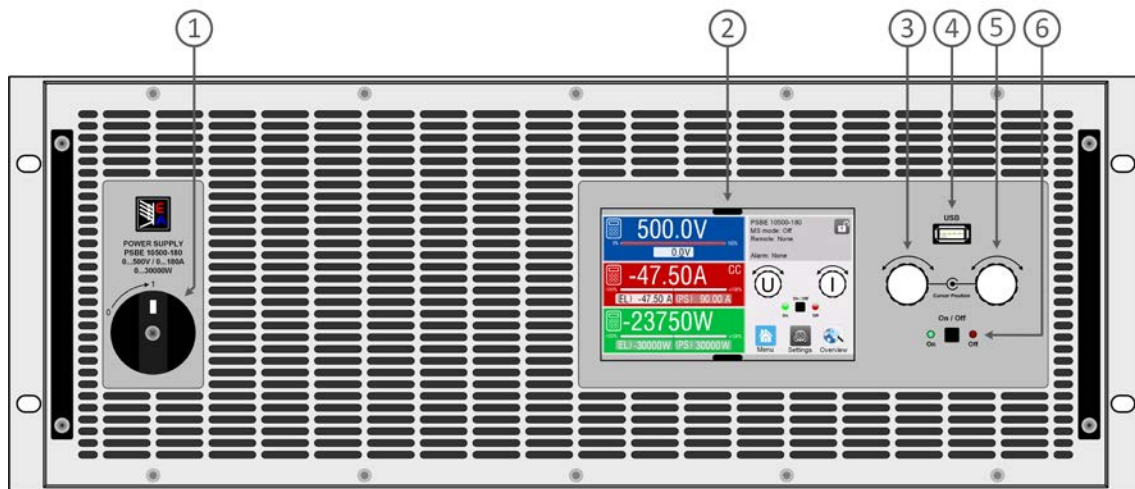


1. Power switch
2. TFT control interface, interactive operation and display
3. Rotary knob with push-button action, for settings and control
4. USB host, uses USB sticks for data logging and sequencing
5. Rotary knob with push-button action, for settings and control
6. On / Off push-button with LED status display

Rear panel description PSBE 10000 4U ≤ 200 V

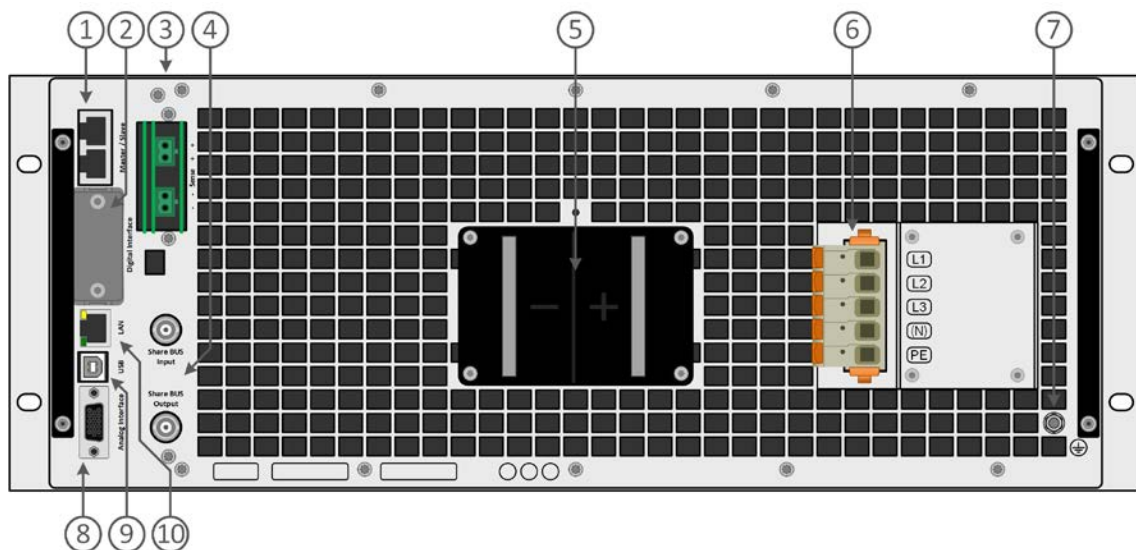


1. Master-Slave bus connectors to set up a system for parallel connection
2. Slot for interfaces
3. Remote sense connectors
4. Share bus connectors to set up a system for parallel connection
5. DC output terminal (copper blades)
6. AC input terminal
7. Grounding connection screw (PE)
8. Connector (DB15 female) for isolated analog programming, monitoring and other functions
9. USB interface
10. Ethernet interface

Technical drawings PSBE 10000 4U ≥ 360 V

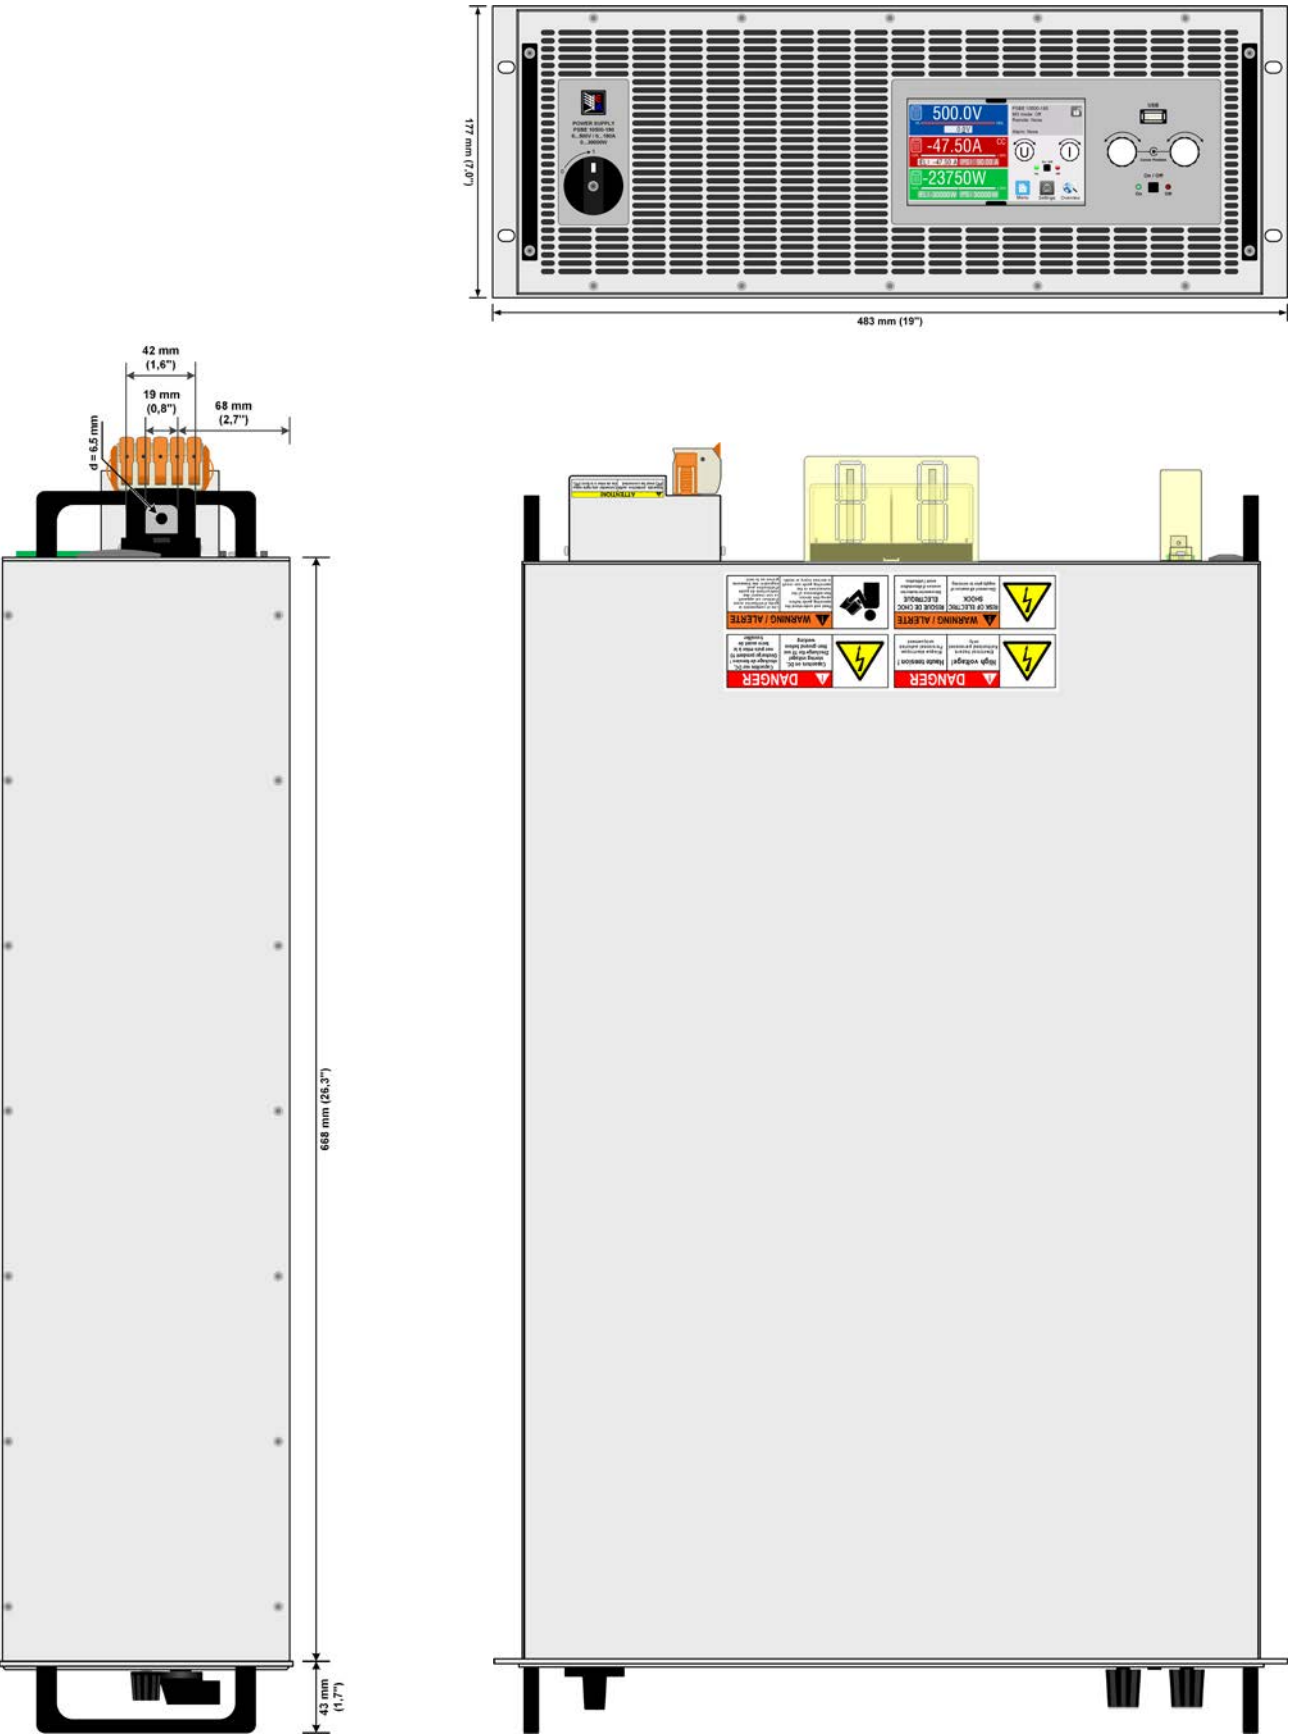


Front panel description PSBE 10000 4U

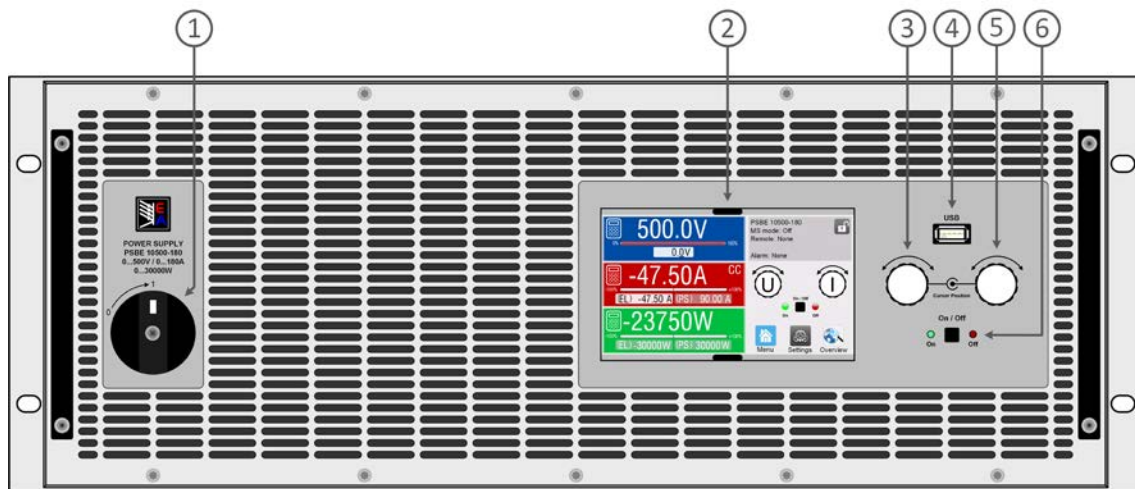


1. Power switch
2. TFT control interface, interactive operation and display
3. Rotary knob with push-button action, for settings and control
4. USB host, uses USB sticks for data logging and sequencing
5. Rotary knob with push-button action, for settings and control
6. On / Off push-button with LED status display

Rear panel description PSBE 10000 4U ≥ 360 V

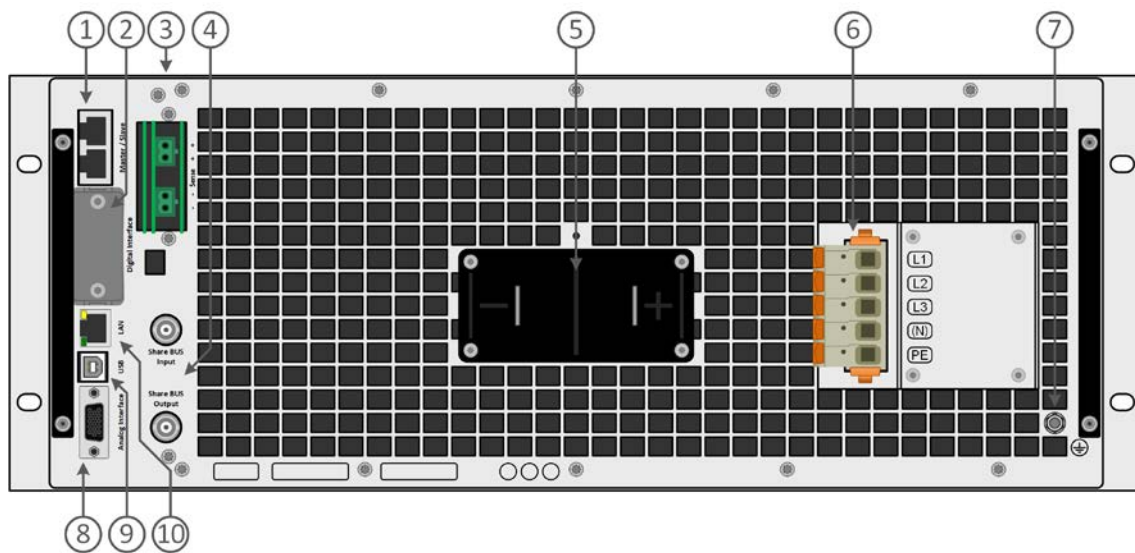


1. Master-Slave bus connectors to set up a system for parallel connection
2. Slot for interfaces
3. Remote sense connectors
4. Share bus connectors to set up a system for parallel connection
5. DC output terminal (copper blades)
6. AC input terminal
7. Grounding connection screw (PE)
8. Connector (DB15 female) for isolated analog programming, monitoring and other functions
9. USB interface
10. Ethernet interface

Front panel description PSBE 10000 4U with Water Cooling option

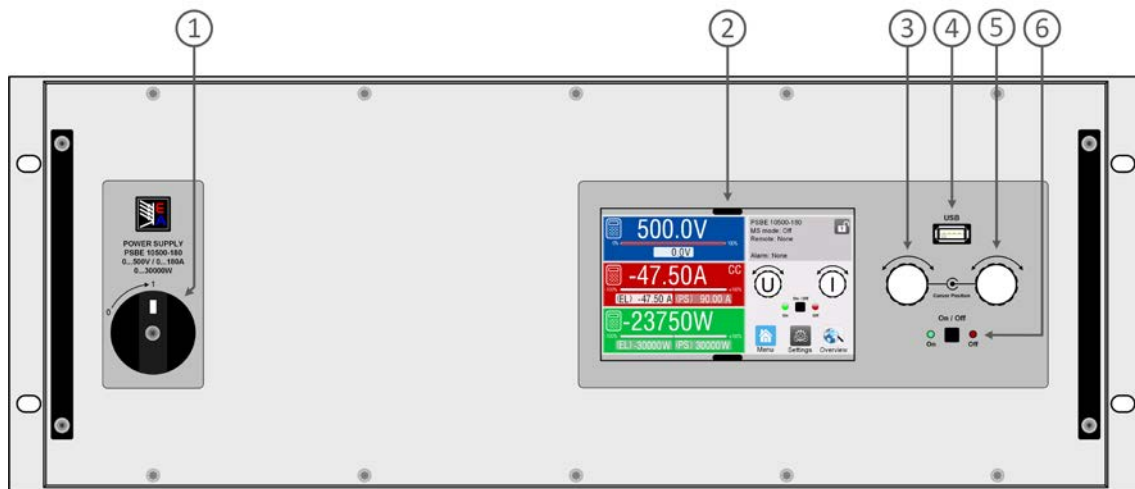

1. Power switch
2. TFT control interface, interactive operation and display
3. Rotary knob with push-button action, for settings and control
4. USB host, uses USB sticks for data logging and sequencing
5. Rotary knob with push-button action, for settings and control
6. On / Off push-button with LED status display

Rear panel description PSBE 10000 4U with Water Cooling option

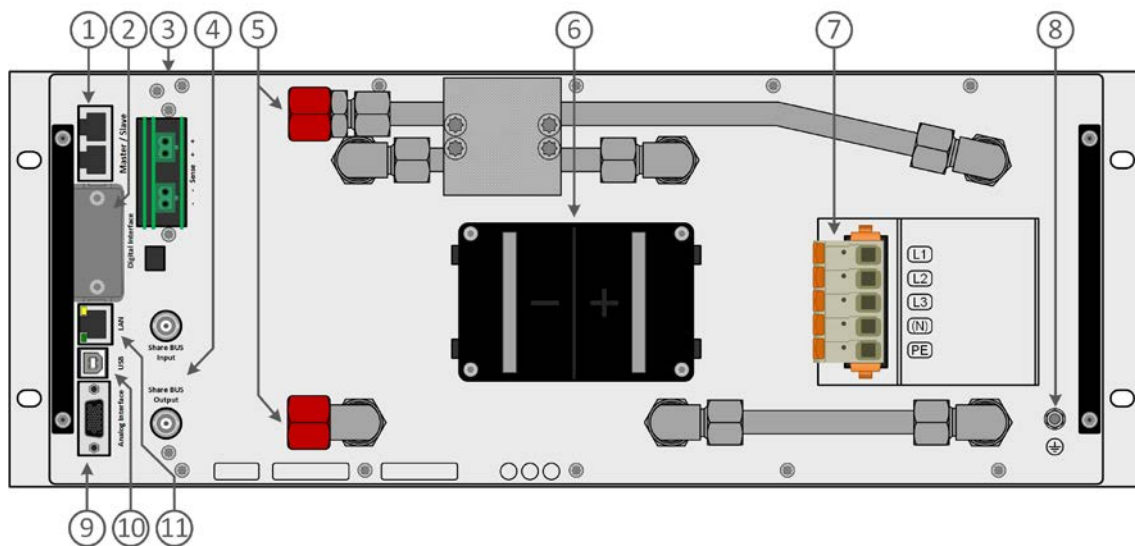

1. Master-Slave bus connectors to set up a system for parallel connection
2. Slot for interfaces
3. Remote sense connectors
4. Share bus connectors to set up a system for parallel connection
5. Inlets and outlets for water-cooling
6. DC output terminal (copper blades)
7. AC input terminal
8. Grounding connection screw (PE)
9. Connector (DB15 female) for isolated analog programming, monitoring and other functions
10. USB interface
11. Ethernet interface

EA Elektro-Automatik GmbH & Co. KG

Helmholtzstr. 31-37
41747 Viersen

Phone +49 2162 3785 - 0
Fax +49 2162 1623 - 0
ea1974@elektroautomatik.com

www.elektroautomatik.com

EA Elektro-Automatik Inc.

7926 Convoy Court
CA, 92111, San Diego

Phone +1 (858) 836 1300
sales@elektroautomatik.com

www.eapowered.com

