



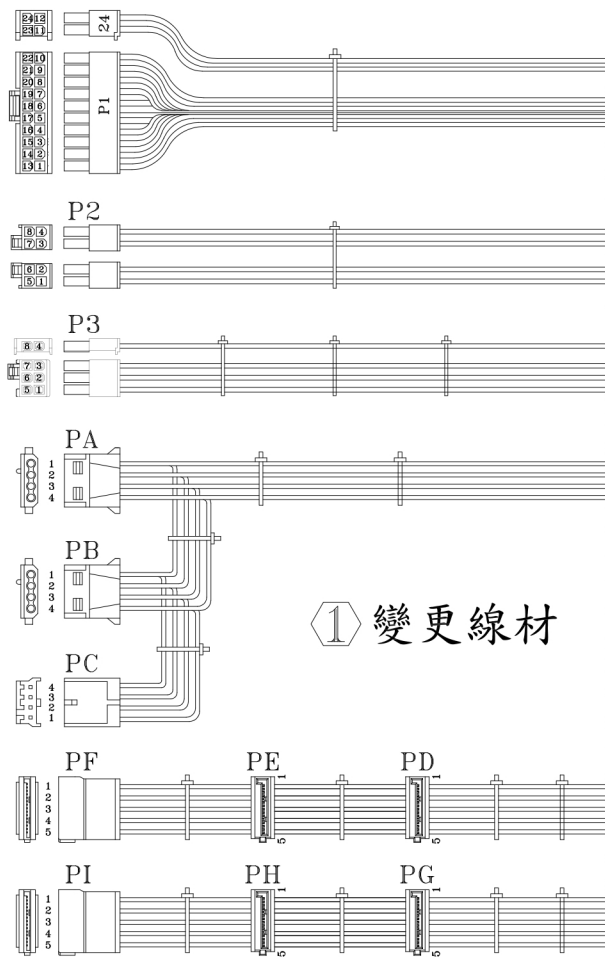

① 變更線材

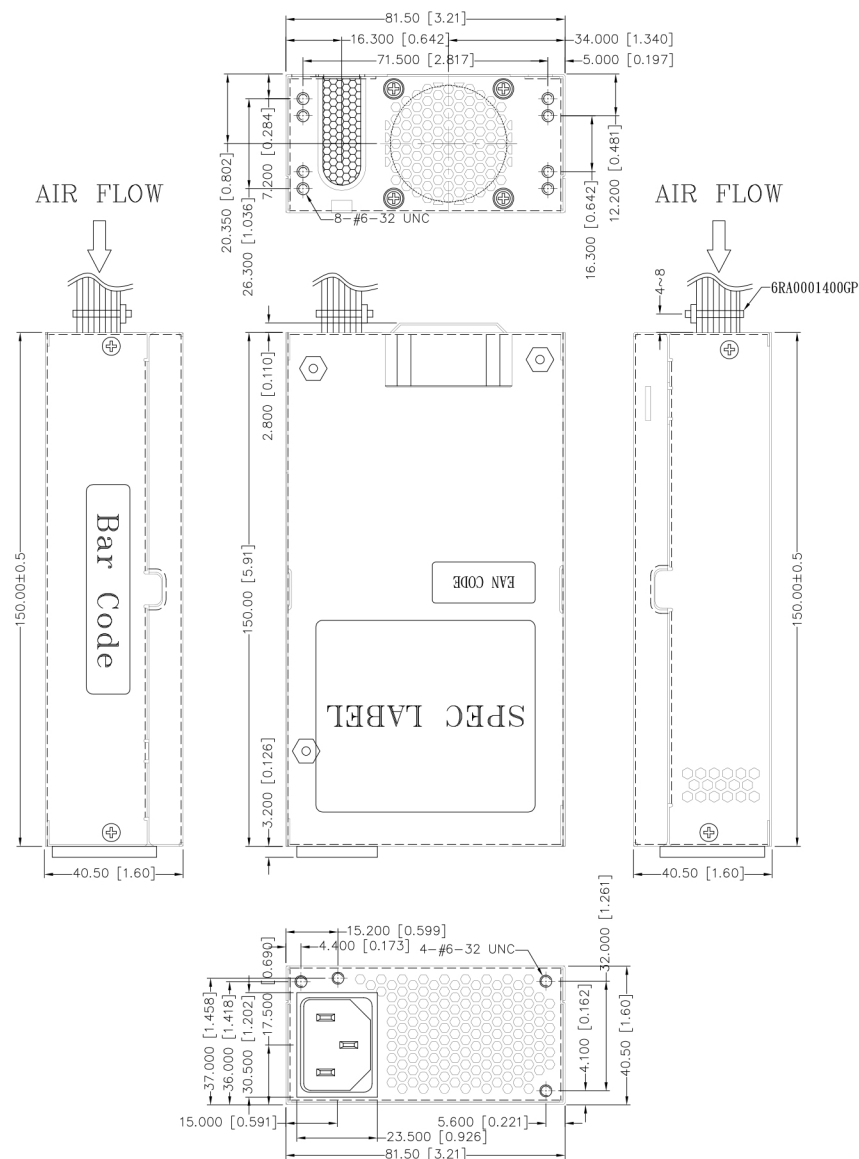

NOTE:

1. ALL THE LENGTH OF OUTPUT WIRES EXCLUDE HOUSING.
2. 公差: .XX=±0.5 [0.02]、.XXX=±0.25 [0.01]

UNIT:mm

REF. ID.	PIN NO.	SIGNAL	WIRE COLOR	GAUGE	CONNECTOR TYPE	CABLE LENGTH
P1 24	1	+3.3V	ORANGE	20	WST P20 – I42002K11D+P4 – I42002K11D or EQUIV.	360±15mm
	2	+3.3V	ORANGE	20		
	3	COM	BLACK	20		
	4	+5V	RED	20		
	5	COM	BALCK	20		
	6	+5V	RED	20		
	7	COM	BALCK	20		
	8	PW –OK	GRAY	22		
	9	+5Vs b	PURPLE	20		
	10	+12V	YELLOW	20		
	11	+12V	YELLOW	20		
	12	+3.3V	ORANGE	20		
	13	+3.3V	ORANGE	20		
	14	+3.3V sense	BROWN	22		
	15	–12V	BLUE	22		
	16	COM	BALCK	20		
	17	PS –ON	GREEN	22		
	18	COM	BALCK	20		
	19	COM	BALCK	20		
	20					
	21	+5V	RED	20		
	22	+5V	RED	20		
	23	+5V	RED	20		
	24	COM	BALCK	20		
P2	1	COM	BALCK	20	WST P4 – I42002K3B+P4 – I42002K4B or EQUIV.	360±15mm
	2	COM	BALCK	20		
	3	COM	BALCK	20		
	4	COM	BALCK	20		
	5	+12V	YELLOW	20		
	6	+12V	YELLOW	20		
	7	+12V	YELLOW	20		
	8	+12V	YELLOW	20		
P3	1	+12V	YELLOW	20	WST P8 – I42002K21B – B or EQUIV. (Black)	720±20mm
	2	+12V	YELLOW	20		
	3	+12V	YELLOW	20		
	4	COM	BALCK	20		
	5	COM	BALCK	20		
	6	COM	BALCK	20		
	7	COM	BALCK	20		
	8	COM	BALCK	20		
PA	1	+12V	YELLOW	20	WST P4 – A10202 or EQUIV.	450±15mm
	2	COM	BALCK	20		
	3	COM	BALCK	20		
	4	+5V	RED	20		
PB	1	+12V	YELLOW	20	WST P4 – A10202 or EQUIV.	200±10mm
	2	COM	BALCK	20		
	3	COM	BALCK	20		
PC	4	+5V	RED	20	AMP 171822 – 4 or EQUIV.	200±10mm
	1	+5V	RED	22		
	2	COM	BALCK	22		
	3	COM	BALCK	22		
PD PG	4	+12V	YELLOW	22	MOLEX SD– 67926 –0311 or EQUIV.	450±15mm
	1	+3.3V	ORANGE	20		
	2	COM	BALCK	20		
	3	+5V	RED	20		
	4	COM	BALCK	20		
PE PH	5	+12V	YELLOW	20	MOLEX SD– 67582 –001 or EQUIV.	200±10mm
	1	+3.3V	ORANGE	20		
	2	COM	BALCK	20		
	3	+5V	RED	20		
	4	COM	BALCK	20		
PF PI	5	+12V	YELLOW	20	MOLEX SD– 67582 –001 or EQUIV.	200±10mm
	1	+3.3V	ORANGE	20		
	2	COM	BALCK	20		
	3	+5V	RED	20		
	4	COM	BALCK	20		
5	+12V	YELLOW	20			

P/N.:9PA400CZ04

MODEL NO. : FSP400-50FDB(F660001)		TITLE: ASSY	SHEET: 1 OF 1	REV:01
R&D(2)	PE	DRAWN	DATE	
		黃淑芳	JUN.27.2019	
INTERIOR COUNTERSIGN:				