



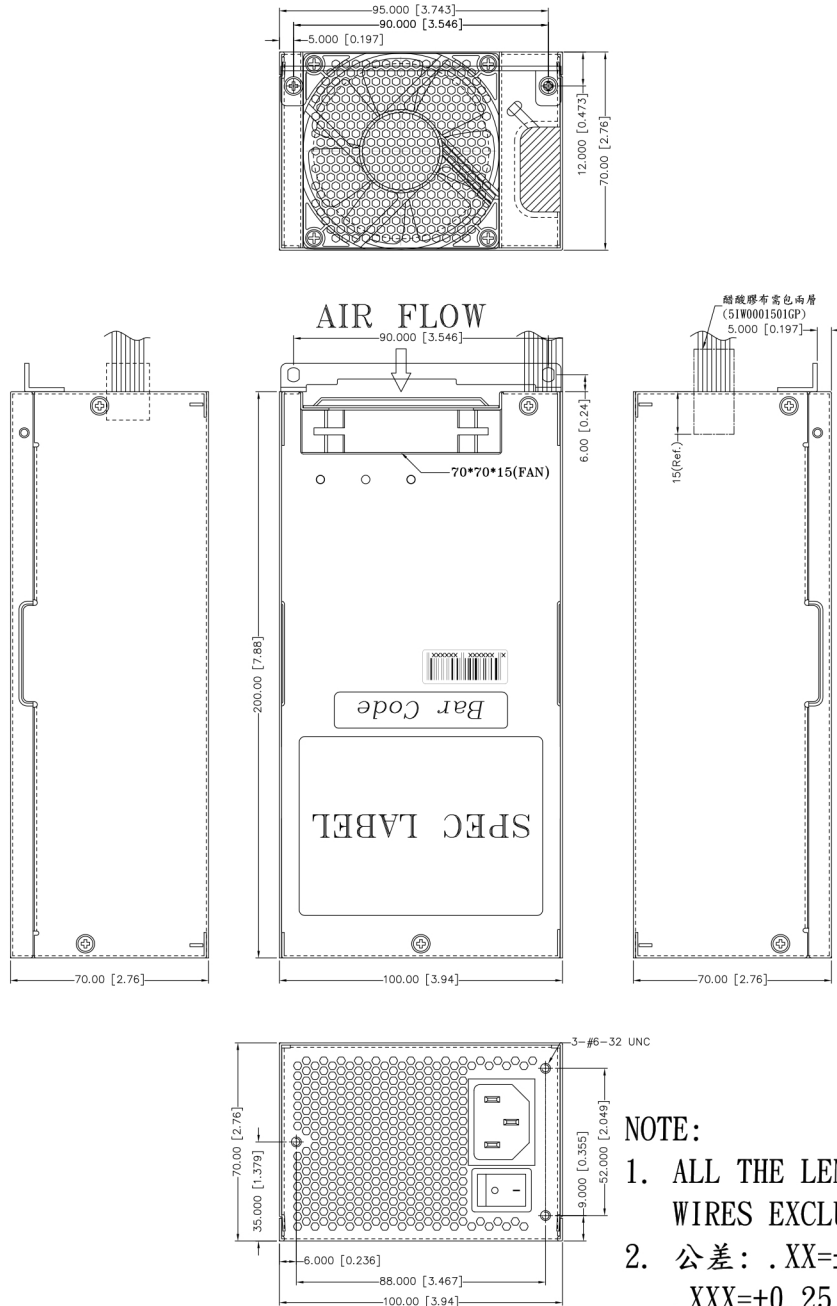

NOTE:

1. ALL THE LENGTH OF OUTPUT WIRES EXCLUDE HOUSING.
2. 公差: .XX=±0.5 [0.02]、.XXX=±0.25 [0.01]

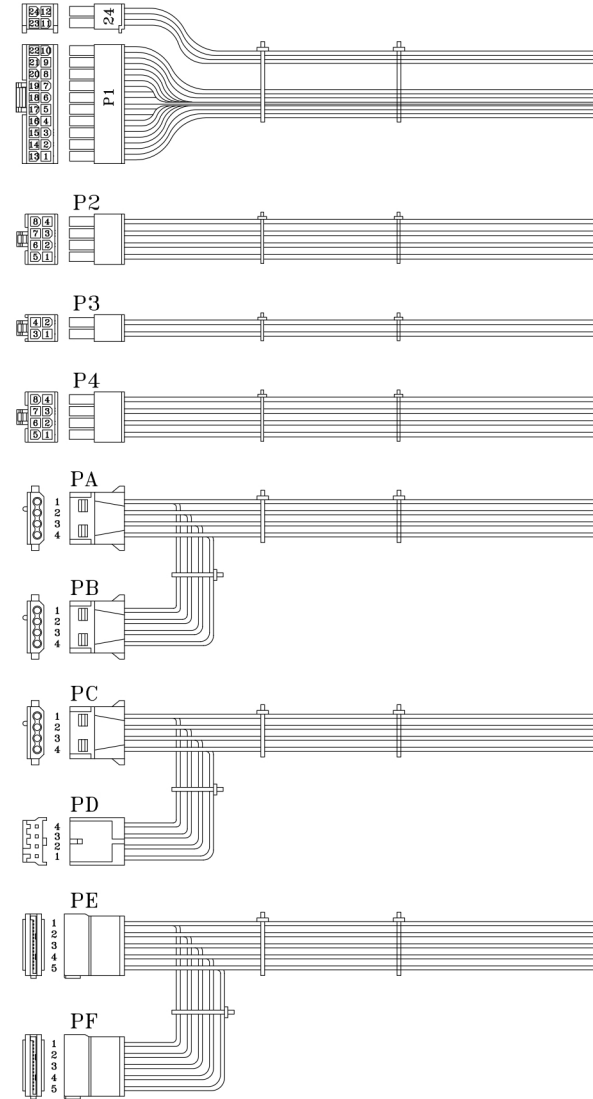

REF. ID.	PIN NO.	SIGNAL	WIRE COLOR	GAUGE	CONNECTOR TYPE	CABLE LENGTH
P1/24	1	+3.3V	ORANGE	20	WST P20-142002K11D+P4-142002K11D or EQUIV.	500±15mm
	2	+3.3V	ORANGE	20		
	3	COM	BLACK	20		
	4	+5V	RED	20		
	5	COM	BALCK	20		
	6	+5V	RED	20		
	7	COM	BALCK	20		
	8	PW-OK	GRAY	24		
	9	+5Vsb	PURPLE	20		
	10	+12V	YELLOW	20		
	11	+12V	YELLOW	20		
	12	+3.3V	ORANGE	20		
	13	+3.3V	ORANGE	20		
	13	+3.3Vsense	BROWN	24		
	14	-12V	BLUE	24		
	15	COM	BALCK	20		
	16	PS-ON	GREEN	24		
	17	COM	BALCK	20		
	18	COM	BALCK	20		
	19	COM	BALCK	20		
	20	-5V	WHITE	24		
	21	+5V	RED	20		
	22	+5V	RED	20		
	23	+5V	RED	20		
	24	COM	BALCK	20		
P2/P4	1	COM	BALCK	20	MOLEX 39-01-2080 or EQUIV.	500±15mm
	2	COM	BALCK	20		
	3	COM	BALCK	20		
	4	COM	BALCK	20		
P3	5	+12V	YELLOW	20	MOLEX 39-01-2040 or EQUIV.	500±15mm
	6	+12V	YELLOW	20		
	7	+12V	YELLOW	20		
	8	+12V	YELLOW	20		
PA	1	COM	BALCK	20	AMP 1-480424-0 or EQUIV.	500±15mm
	2	COM	BALCK	20		
	3	COM	BALCK	20		
	4	+5V	RED	20		
PB	1	+12V	YELLOW	20	AMP 1-480424-0 or EQUIV.	155±10mm
	2	COM	BALCK	20		
	3	COM	BALCK	20		
	4	+5V	RED	20		
PC	1	+12V	YELLOW	20	AMP 1-480424-0 or EQUIV.	500±15mm
	2	COM	BALCK	20		
	3	COM	BALCK	20		
	4	+5V	RED	20		
PD	1	+12V	YELLOW	20	AMP 171822-4 or EQUIV.	155±10mm
	2	COM	BALCK	22		
	3	COM	BALCK	22		
	4	+12V	YELLOW	22		
PE	1	+3.3V	ORANGE	20	MOLEX SD-67582-001 or EQUIV.	500±15mm
	2	COM	BALCK	20		
	3	+5V	RED	20		
	4	COM	BALCK	20		
	5	+12V	YELLOW	20		
PF	1	+3.3V	ORANGE	20	MOLEX SD-67582-001 or EQUIV.	155±10mm
	2	COM	BALCK	20		
	3	+5V	RED	20		
	4	COM	BALCK	20		

P/N.:9PA400MP03

MODEL NO.: FSP400-50WCB(F660001)		TITLE: ASSY	SHEET: 1 OF 1	REV:01
R&D(2)	PE	DRAWN	DATE	
(110.6)		周書宇	FEB.13.2020	
INTERIOR COUNTERSIGN:				

UNIT:mm