

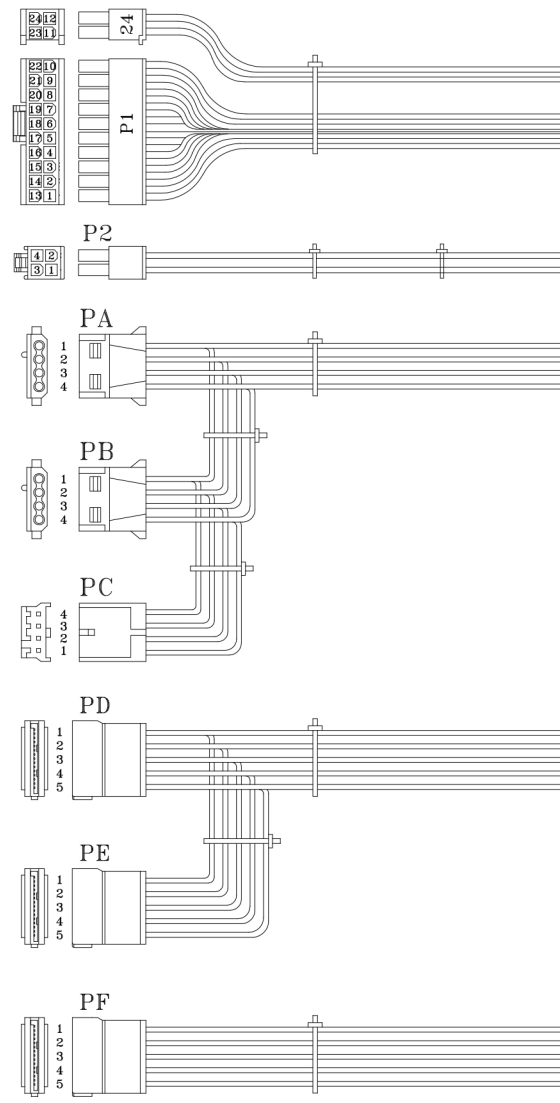


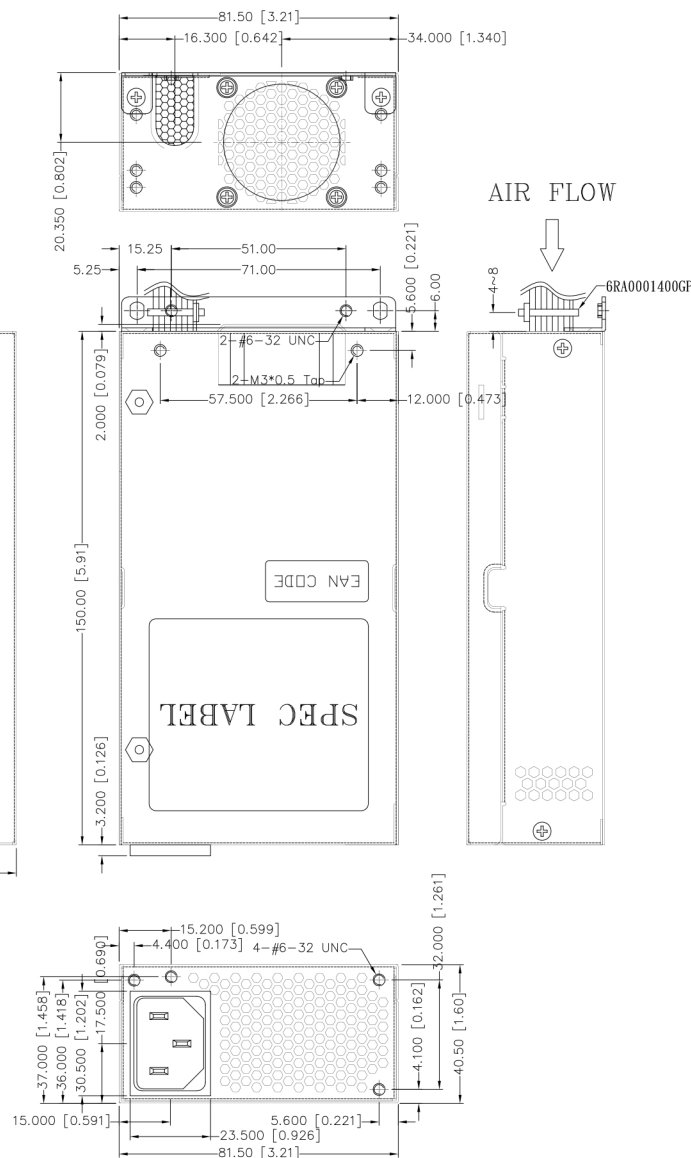

AIR FLOW

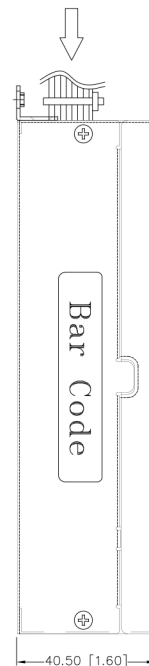

REF. D.	PIN NO.	SIGNAL	WIRE COLOR	GAUGE	CONNECTOR TYPE	LENGTH
P1 / 24	1	+3.3V	ORANGE	20	WST P20-142002K11D +F4 142002K11D or EQUIV.	300±15 mm
	2	+3.3V	ORANGE	20		
	3	COM	BLACK	20		
	4	+5V	RED	20		
	5	COM	BLACK	20		
	6	+5V	RED	20		
	7	COM	BLACK	20		
	8	PW-OK	GRAY	22		
	9	+5Vsb	PURPLE	20		
	10	+12V	YELLOW	20		
	11	+12V	YELLOW	20		
	12	+3.3V	ORANGE	20		
	13	+3.3V	ORANGE	20		
	14	+3.3Vsb	BROWN	22		
	15	-12V	BLUE	22		
	16	COM	BLACK	20		
	17	PS-ON	GREEN	22		
	18	COM	BLACK	20		
	19	COM	BLACK	20		
	20					
	21	+5V	RED	20		
	22	+5V	RED	20		
	23	+5V	RED	20		
	24	COM	BLACK	20		
P2	1	COM	BLACK	20	MOLEX 39-01-2040 or EQUIV.	450±15 mm
	2	COM	BLACK	20		
	3	+12V	YELLOW	20		
	4	+12V	YELLOW	20		
PA	1	+12V	YELLOW	20	WST P4-A10202 or EQUIV.	250±15 mm
	2	COM	BLACK	20		
	3	COM	BLACK	20		
	4	+5V	RED	20		
PB	1	+12V	YELLOW	20	WST P4-A10202 or EQUIV.	155±15 mm
	2	COM	BLACK	20		
	3	COM	BLACK	20		
	4	+5V	RED	20		
PC	1	+5V	RED	22	AMP 171822-4 or EQUIV.	155±10 mm
	2	COM	BLACK	22		
	3	COM	BLACK	22		
	4	+12V	YELLOW	22		
PD	1	+3.3V	ORANGE	20	MOLEX SD-67592 -001 or EQUIV.	250±15 mm
	2	COM	BLACK	20		
	3	+5V	RED	20		
	4	COM	BLACK	20		
	5	+12V	YELLOW	20		
PE	1	+3.3V	ORANGE	20	MOLEX SD-67592 -001 or EQUIV.	100±10 mm
	2	COM	BLACK	20		
	3	+5V	RED	20		
	4	COM	BLACK	20		
	5	+12V	YELLOW	20		
PF	1	+3.3V	ORANGE	20	MOLEX SD-67582 -001 or EQUIV.	300±15 mm
	2	COM	BLACK	20		
	3	+5V	RED	20		
	4	COM	BLACK	20		
	5	+12V	YELLOW	20		

P/N.:9PA250FK05

NOTE:

1. ALL THE LENGTH OF OUTPUT WIRES EXCLUDE HOUSING.
2. 公差: .XX=±0.5 [0.02]、.XXX=±0.25 [0.01]

UNIT:mm [inch]

MODEL NO. : FSP250-50FEB(F660001)		TITLE: ASSY	SHEET: 1 OF 1	REV:02
R&D(2)	PE	DRAWN	DATE	
		周書宇	MAY.27.2020	
INTERIOR COUNTERSIGN:				