

#### TECHNICAL DATASHEET

# 90W Adapter

FSP090-AxxN3 Series





# FSP090-AxxN3 Series

### **FEATURES**

- · Certified IEC 62368-1 & CB 60950-1
- · Meet USA EISA 2007
- Meet Energy Efficiency DOE Level VI
- Meet Code of Conduct Version 5 Tier 2
- · High Reliability
- · Low Profile
- · Over Current Protection
- · Over Temperature Protection
- · Over Voltage Protection
- · With PFC Circuit

### SAFETY STANDARD APPROVAL









### **DESCRIPTION**

This product is a 90 watts AC to DC adapter intended for use in IPC systems, embedded systems, printers, monitors, POS systems and PoE application, that have a high wattage demands. This adapter operates at 90 to 264 VAC input voltage. The unit meets CISPR32 EN55032 CLASS B, EN55024 and FCC PART 15B Class B emission limits, and is designed for ITE application.

### **INPUT SPECIFICATIONS**

Input voltage: 90-264 VAC Input frequency: 47-63 Hz

100Vac, 240Vac / full load  $\leq$  1.2A Input current: 115Vac , 230Vac ≦ 0.5W 264Vac / 50Hz ≦ 0.25mA No load power consumption Touch current:

#### **OUTPUT SPECIFICATIONS**

Output voltage/current: See rating chart 90W

Total output power:

Protection:

Over voltage: The adapter will enter into shut down that means no output while over voltage happened at output terminal that caused

by internal fault, the output trip voltage shall not exceed 29/35/60/65\* volts. That will be return to normal state by AC

reset

When an internal fault occurs, or an Short circuit & Over current:

external fault is applied to the power supply, such that an overload or short circuit is applied to the output, the power supply shall shut down and enter

auto-recovery mode.

The power supply will enter into shut Over temperature: down while the abnormal thermal rise

occurs. That will be return to normal state by AC reset.

Set at 60Vac~70Vac Brown-out

Environment

Working TEMP. 0~70°C (> 40°C de-rating )

Storage TEMP. -20~+80°C

Working Humidity 20~80% RH non-condensing Storage Humidity 10~90% RH non-condensing

# **INPUT SPECIFICATIONS**

115Vac, 230Vac / full load ≥ 0.9 Power factor:

Provisions for adding harmonic reduction per EN

61000-3-2 must be present.

Efficiency: See rating chart

Power turn-on time At 100Vac / full load, output voltage shall remain

Hold-up time:

regulation ≦ 3Sec At 100Vac or 240Vac / full load, output voltage shall remain regulation ≥10ms Inrush current:

100Vac, 240Vac / full load, Shall be less than the rating of adapter critical component (including rectifiers, fuse

Operating altitude: surge and current limiting device)

Withstand voltage: 5000 meters above sea level

Between AC input and secondary applied DC 4242V,test MTBF: time 1 minute, cut off current shall be less than 10mA

100Vac, 240Vac / full load, 300,000 hours at 25°C,

EMC Performance: standard SR332

EN55032

**FCC** Class B conducted, class B radiated **VCCI** Class B conducted, class B radiated EN61000-3-2 Class B conducted, class B radiated

EN61000-3-3 Meet class D EN61000-4-2 Meet regulation

Air discharge: ±15 KV,contact discharge: ±8KV, meet EN61000-4-3 criterion A

EN61000-4-4 80 ~1000 MHz,3V/m,80% AM(1kHz), meet criterion A EN61000-4-5 Impulse: ±1kV applied to L,N,meet criterion A

EN61000-4-6 ±1kV applied differential mode, ±2kV applied common EN61000-4-8 mode, meet criterion A

0.15 ~ 80 MHz,3Vrms,80% AM(1kHz),meet criterion A EN61000-4-11 50 Hz or 60Hz,1A/m,meet criterion A

Voltage Dips

>95% reduction for 0.5 period,meet criterion B 30% reduction for 25 period, meet criterion C

Voltage Interruptions Power de-rating:

>95% reduction for 250 period,meet criterion C 100Vac or 240Vac, 0°C to 40°C, 100% load, 50°C, 85% load, 60°C, 70% load, 70°C, 55% load (Shall be less than the rating of adapter critical component, follow FSP


specification (adapter))




# 90W Adapter FSP090-AxxN3 Series



## **INPUT VOLTAGE DERATING CURVE**

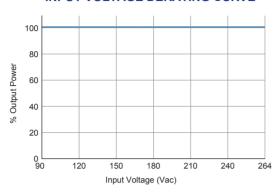

## **OUTPUT POWER DERATING CURVE**

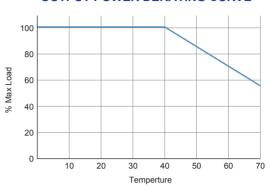

### **OUTPUT VOLTAGE/CURRENT RATING CHART**


Model	Output Voltage	Output Current	AC Inlet	Efficiency		Over Voltage
				DOE(Level VI)	CoC V5 (Tier 2)	Protection
FSP090-ABAN3	19V	4.74A	C14	≥88%	≧89%	29 Volts
FSP090-ABBN3	19V	4.74A	C6			
FSP090-AAAN3	24V	3.75A	C14			35 Volts
FSP090-AABN3	24V	3.75A	C6			
FSP090-AFAN3	48V	1.88A	C14			60 Volts
FSP090-AFBN3	48V	1.88A	C6			
FSP090-AWAN3	54V	1.67A	C14			65 Volts
FSP090-AWBN3	54V	1.67A	C6			




# 90W Adapter FSP090-AxxN3 Series



## **MECHANICAL SPECIFICATIONS**

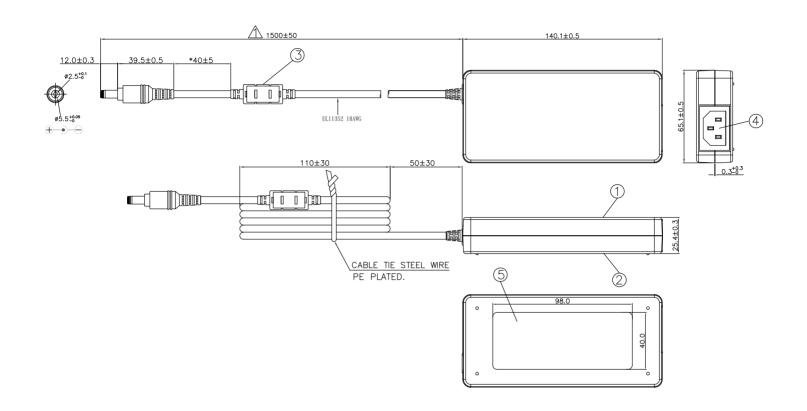

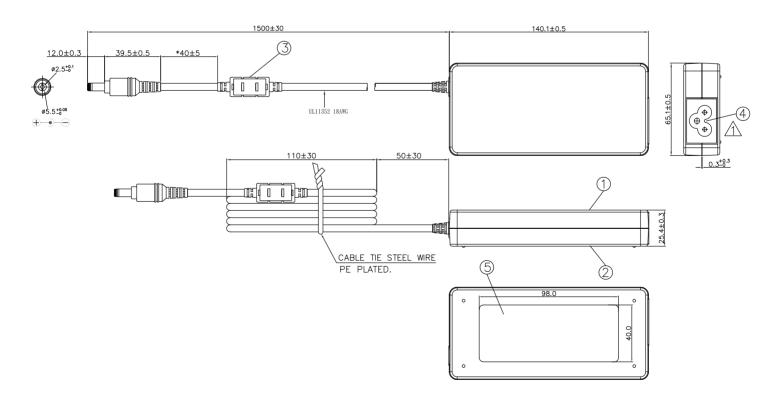



# 90W Adapter FSP090-AxxN3 Series



# **CONNECTOR SPECIFICATIONS**

