



19 inch Power Supply Chassis System

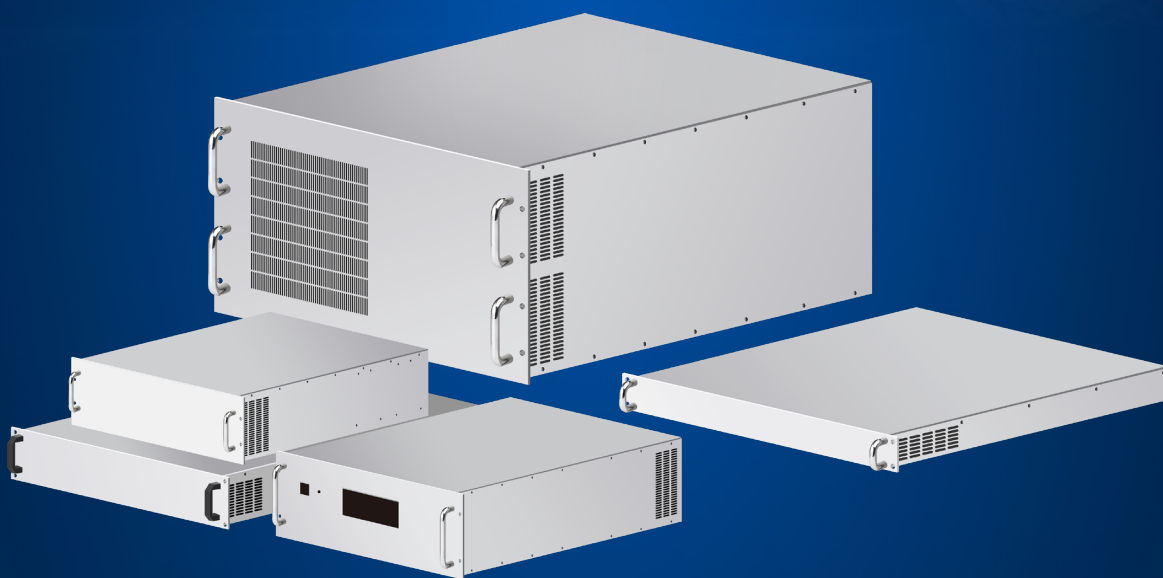

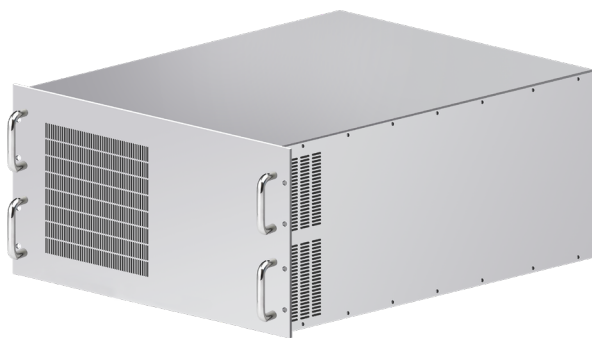

Specifications


- Chassis with 482.6 (19") standard
- Overall dimension: W482.6×D671mm

General Information

Material	Sheet steel Aluminium Galvanized plate
Surface treatment	Front plate,side plates,top and bottom plates: powder-coated Rear plates:powder-coated or nickel-coated Handle: colorless oxidation
Colour	Front panel,side plates,top and bottom plates: RAL 7035 or customizing
Supply includes	Front plate, side plates,top and bottom plates,handle

Chassis Dimension Chart Collection

* The two-place 57.2 applies only to the 6U chassis

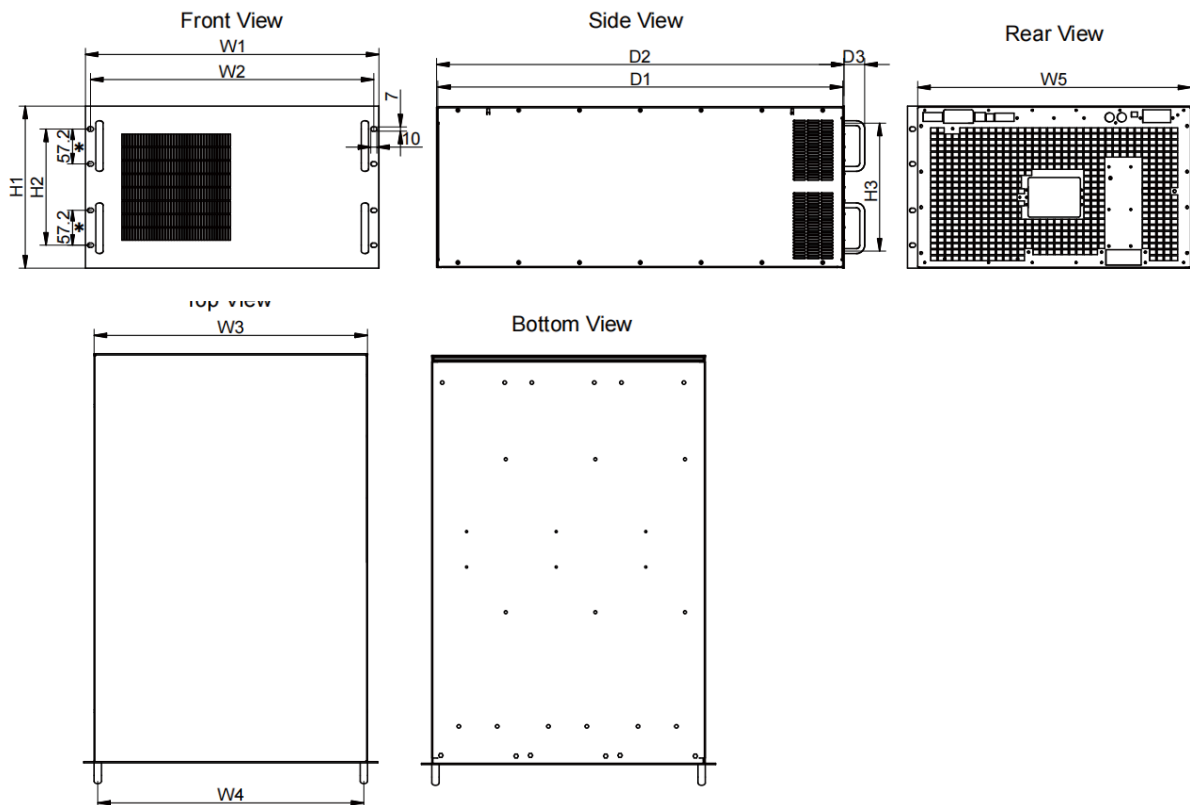

Dimensioning Instructions

- W1 = Overall width
 W2 = Mounting hole spacing
 W3 = Case body width
 W4 = Handle width direction center distance
 W5 = Rear panel width

 D1 = Case body depth
 D2 = Overall depth of case body
 D3 = Handle depth (two options)

 H1 = Panel height
 H2 = Mounting hole spacing in height direction
 H3 = Handle spacing in height direction

Ordering Information

n.U	Art. Nr.	Width dimensions mm					Depth dimensions mm			Height dimensions mm		
		W1 ±0.8	W2 ±0.3	W3 ±0.8	W4 ±0.8	W5 ±0.5	D1 ±0.8	D2 ±0.8	D3 ±0.2	H1 ±0.2	H2 ±0.2	H3 ±0.3
1U	BJ9900001	482.6	465	449	437	449	666	670.5	26/32	43.6	31.8	30/32
2U	BJ9900002	482.6	465	449	437	449	666	670.5	26/32	88.1	76.2	55/64
3U	BJ9900003	482.6	465	449	437	449	666	670.5	35/38	132.5	57.2	96/100
4U	BJ9900004	482.6	465	449	437	449	666	670.5	35/38	177	101.6	125/128
5U	BJ9900005	482.6	465	449	437	449	666	670.5	35/38	221.4	146.1	160
6U	BJ9900006	482.6	465	449	437	449	666	670.5	35/38	265.9	190.5 57.2*2	192/203